



SYDNEY DYNO Pty Ltd Kensington 0418 224000

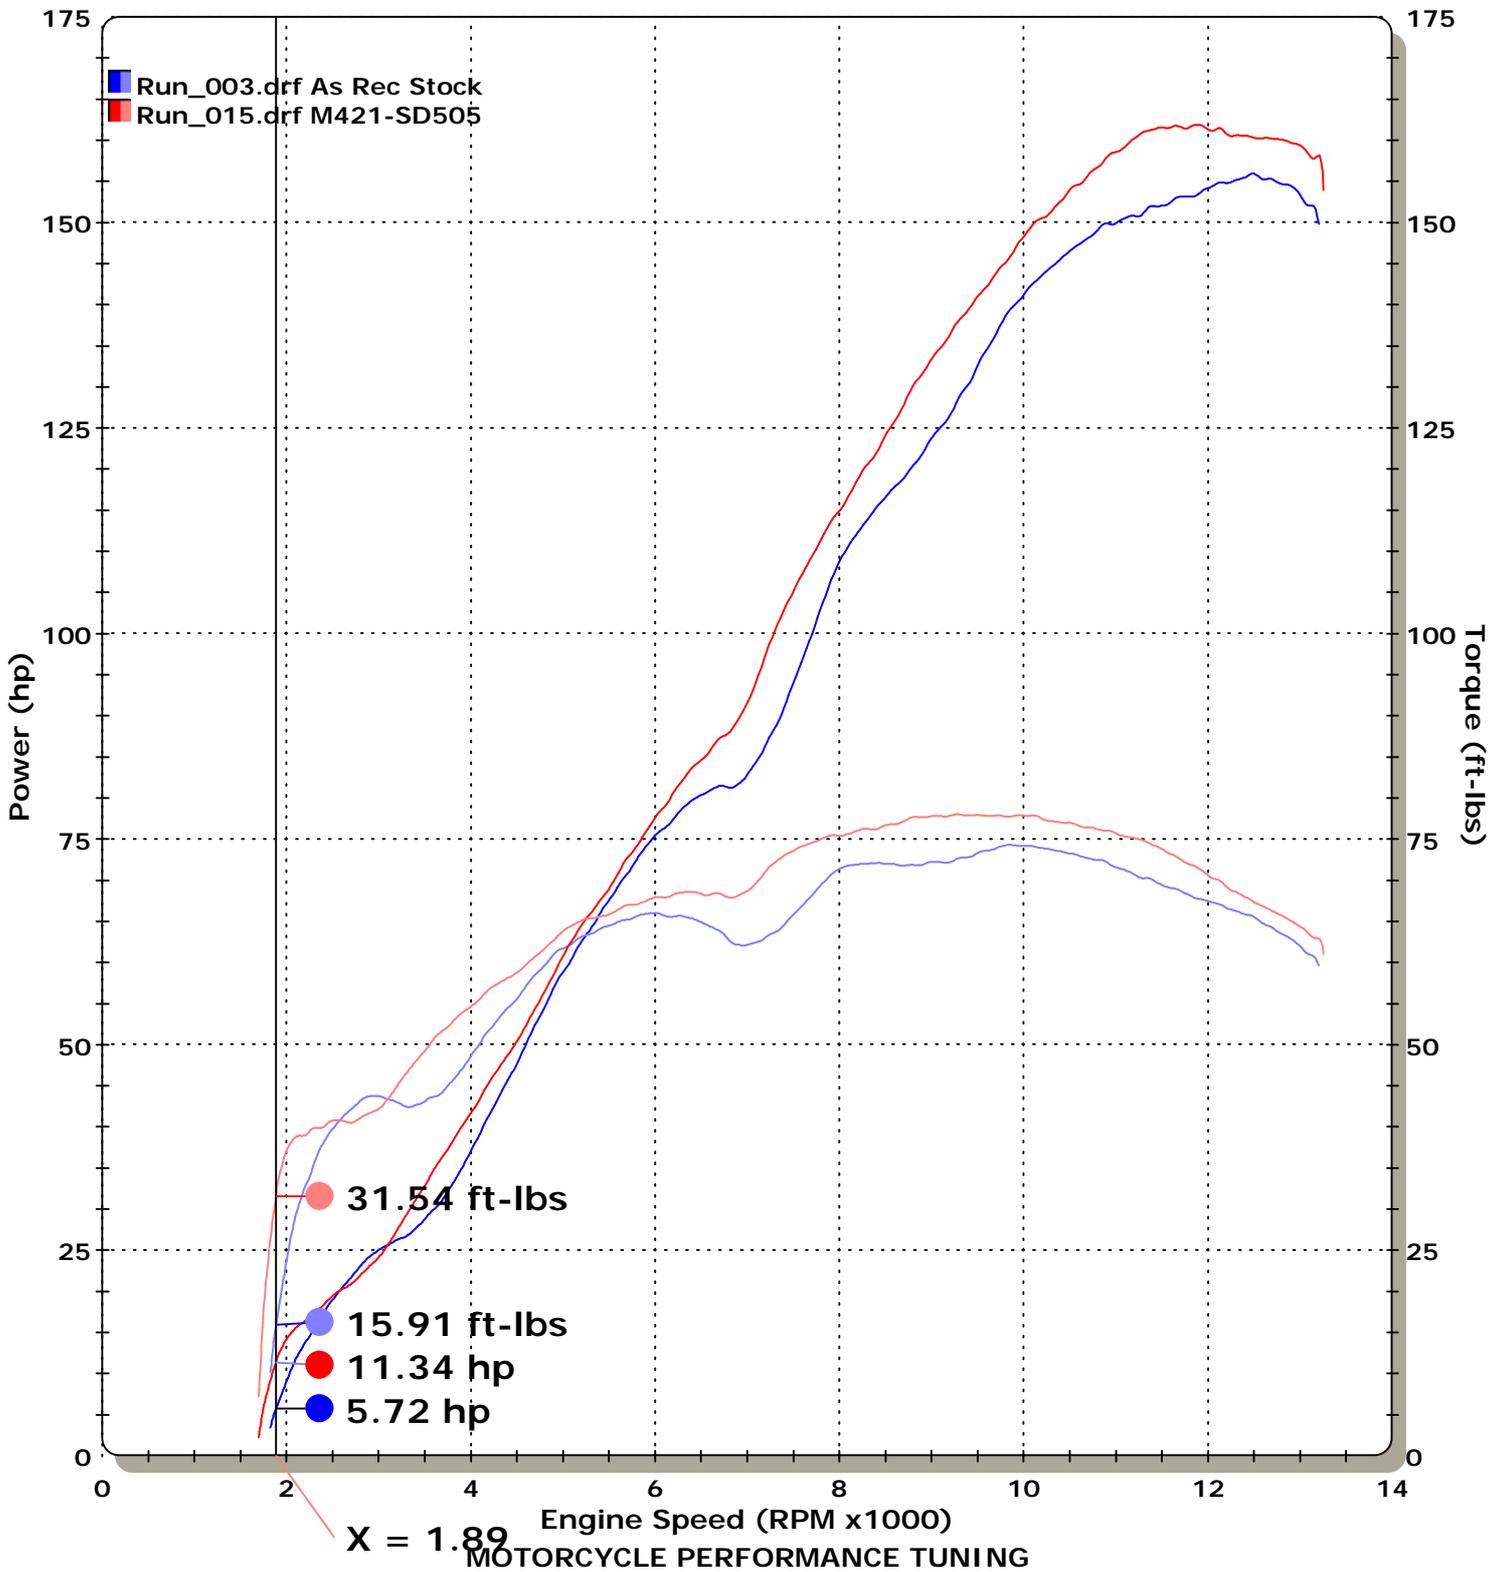

Run_003.drf - 9/09/2006 12:03:12 PM Run Type: RO Run Conditions: 23.59 °C, 1025.01 mBars, Humidity: 51%, SAE: 0.97
 As Rec Stock
 Max Power = 155.90 Max Torque = 74.28
 6/05 3,586km R/T/g 40psi Stock

Run_015.drf - 30/09/2006 9:08:34 AM Run Type: RO Run Conditions: 26.65 °C, 1024.62 mBars, Humidity: 34%, SAE: 0.98
 M421-SD505
 Max Power = 161.84 Max Torque = 77.98
 6/05 3,846km R/T/g 40psi Micron full sys PiperX Graves V/S


SYDNEY DYNO Pty Ltd Kensington 0418 224000

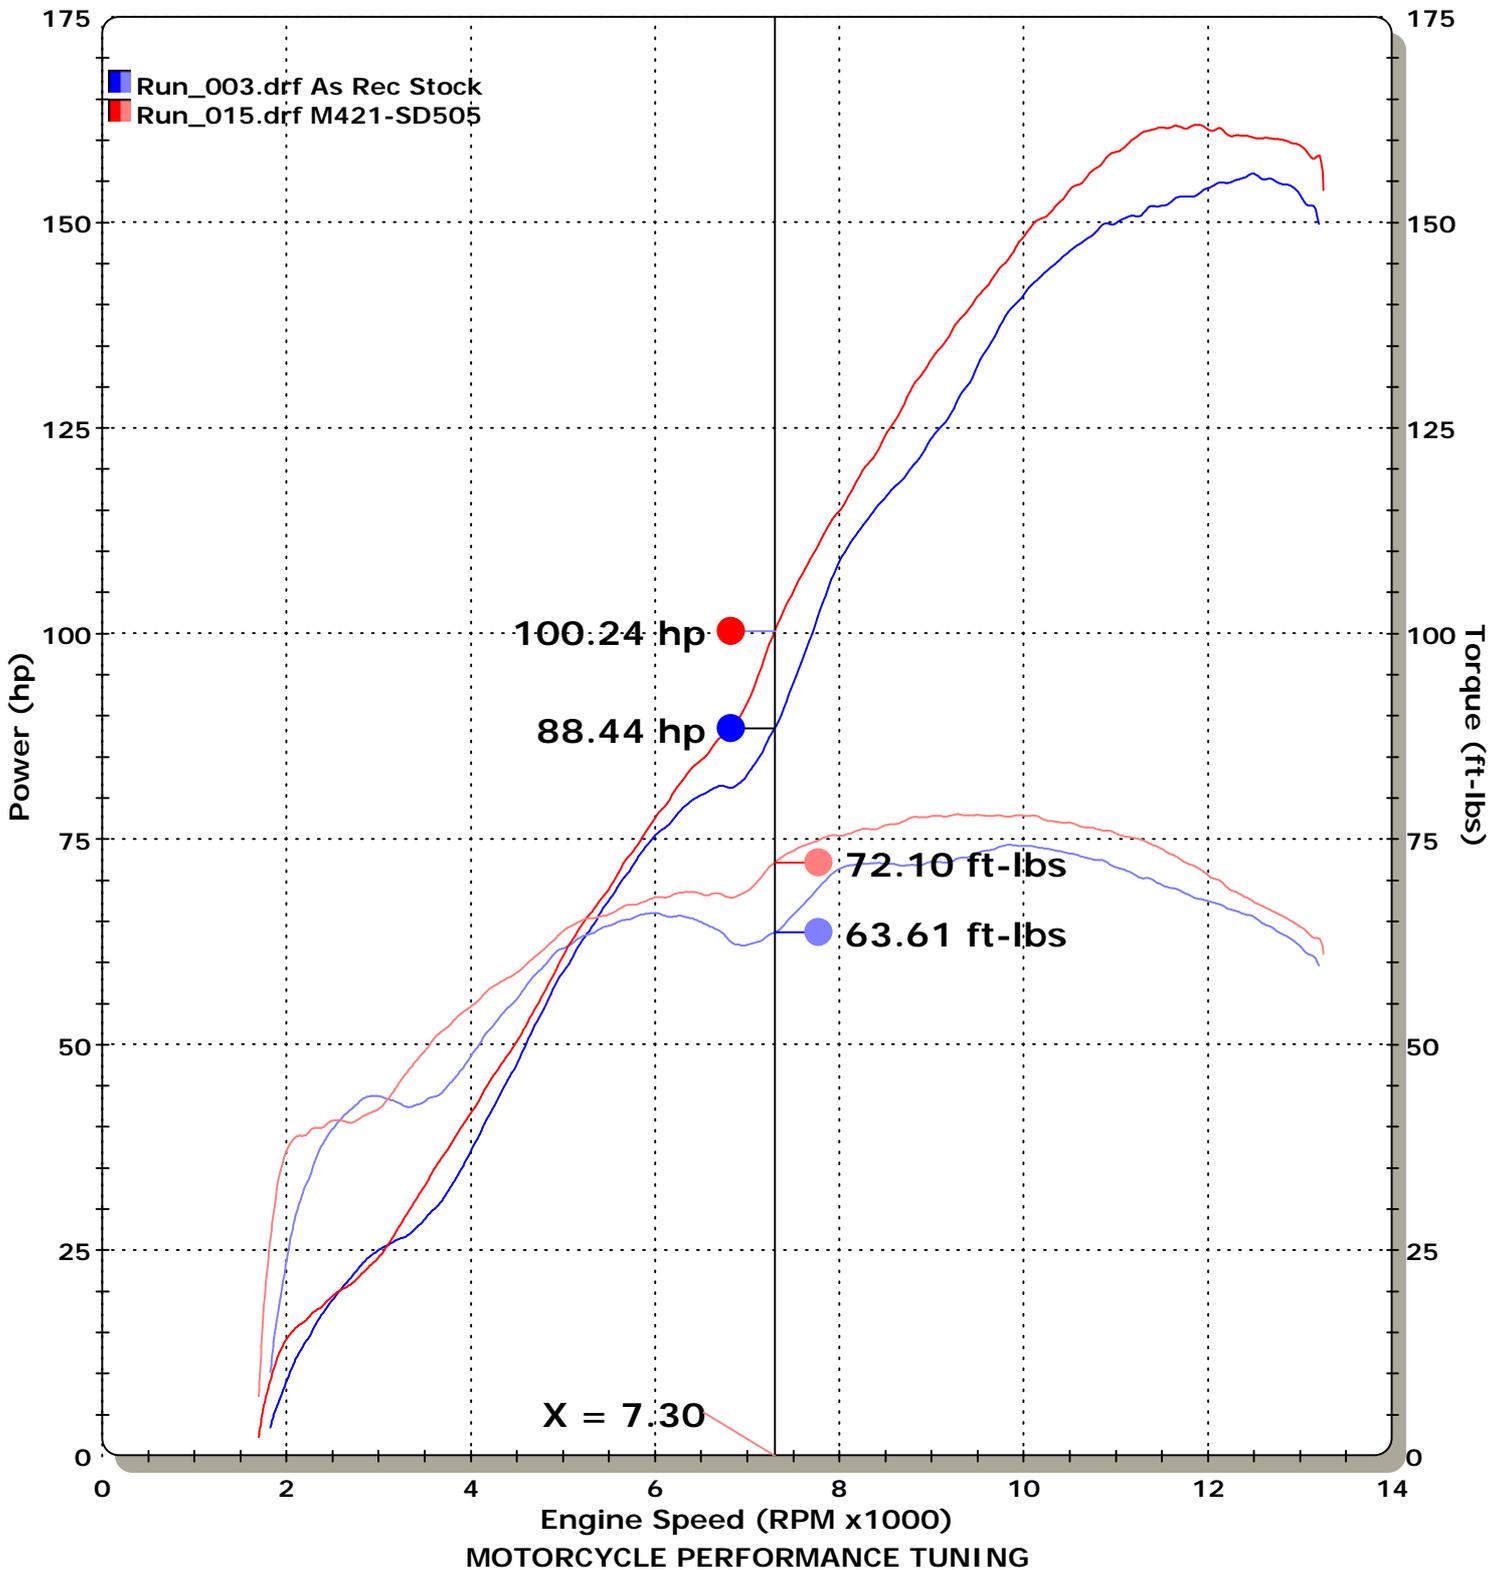

Run_003.drf - 9/09/2006 12:03:12 PM Run Type: RO Run Conditions: 23.59 °C, 1025.01 mBars, Humidity: 51%, SAE: 0.97 As Rec Stock
Max Power = 155.90 Max Torque = 74.28
6/05 3,586km R/T/g 40psi Stock

Run_015.drf - 30/09/2006 9:08:34 AM Run Type: RO Run Conditions: 26.65 °C, 1024.62 mBars, Humidity: 34%, SAE: 0.98 M421-SD505
Max Power = 161.84 Max Torque = 77.98
6/05 3,846km R/T/g 40psi Micron full sys PiperX Graves V/S


SYDNEY DYNO Pty Ltd Kensington 0418 224000

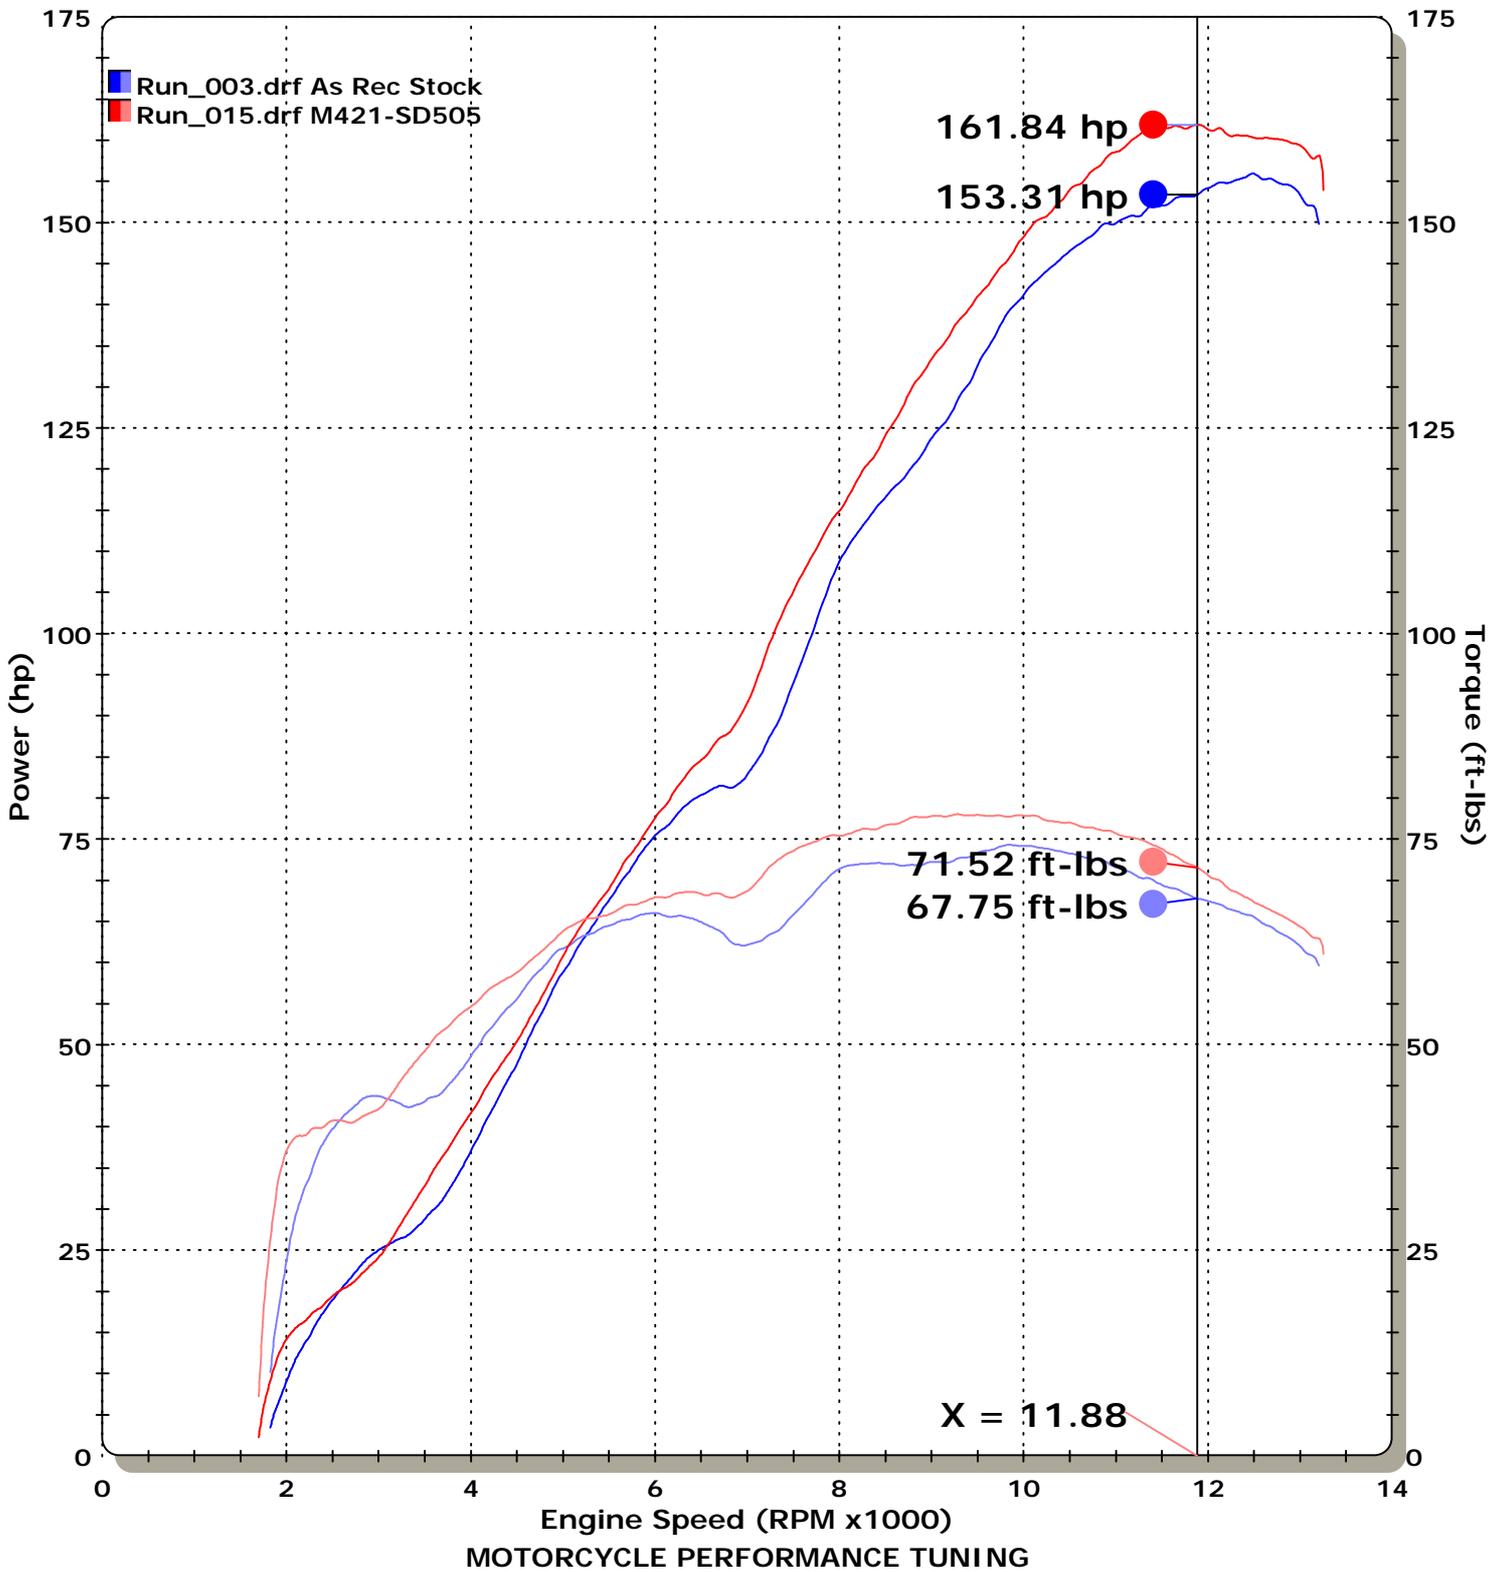

Run_003.drf - 9/09/2006 12:03:12 PM Run Type: RO Run Conditions: 23.59 °C, 1025.01 mBars, Humidity: 51%, SAE: 0.97
As Rec Stock
Max Power = 155.90 Max Torque = 74.28
6/05 3,586km R/T/g 40psi Stock


Run_015.drf - 30/09/2006 9:08:34 AM Run Type: RO Run Conditions: 26.65 °C, 1024.62 mBars, Humidity: 34%, SAE: 0.98
M421-SD505
Max Power = 161.84 Max Torque = 77.98
6/05 3,846km R/T/g 40psi Micron full sys PiperX Graves V/S

SYDNEY DYNO Pty Ltd Kensington 0418 224000

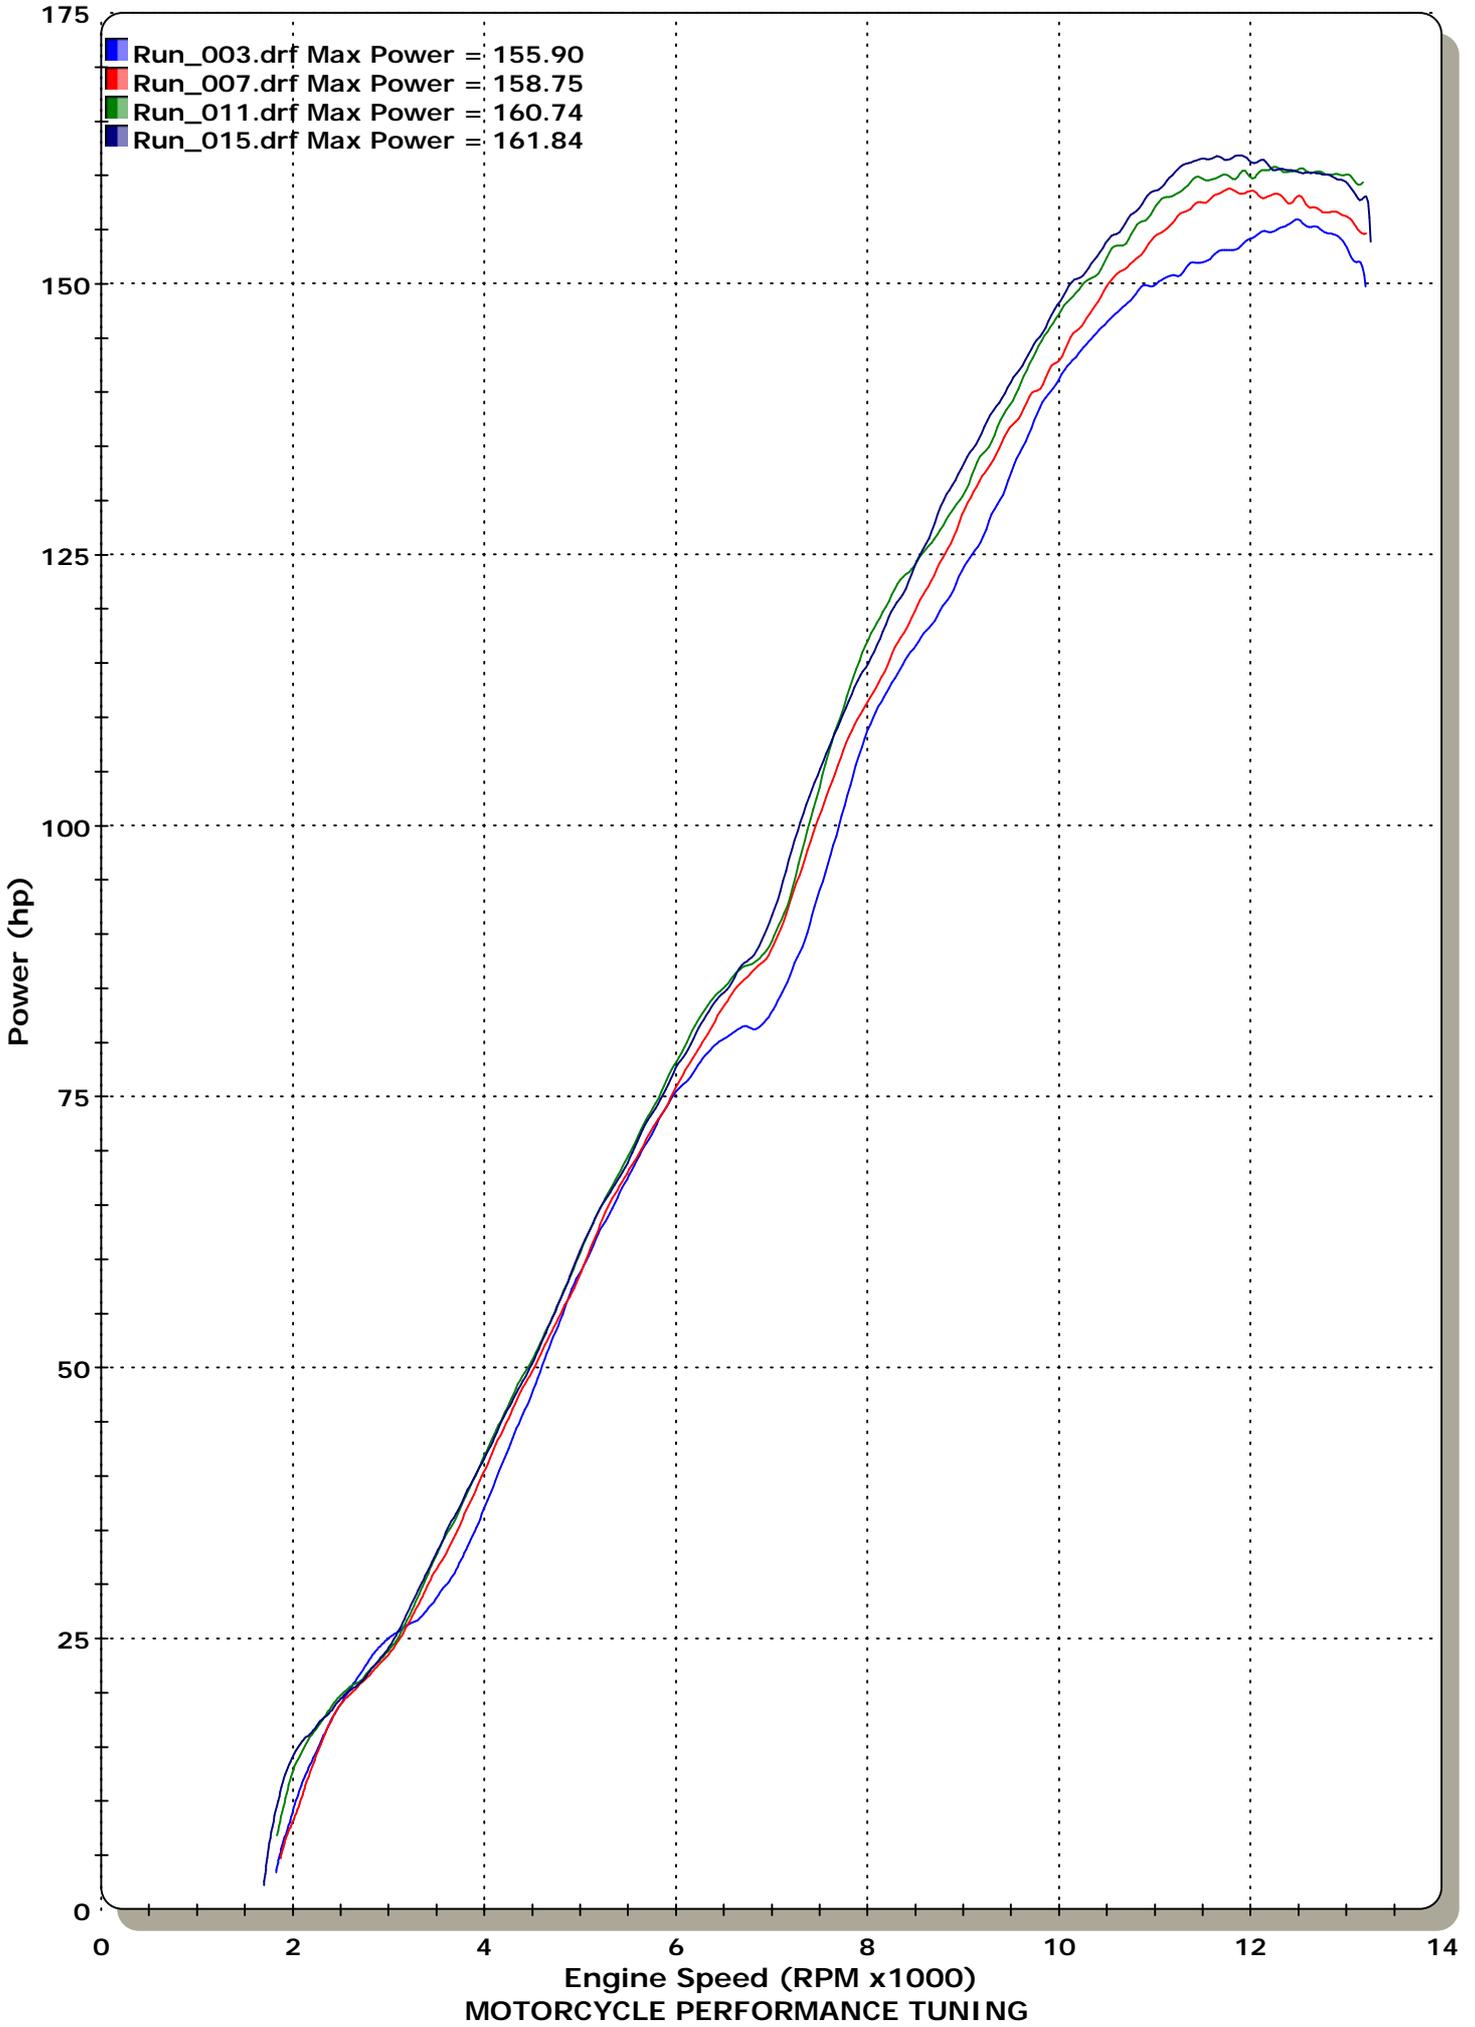

- Run_003.drf - 9/09/2006 12:03:12 PM Run Type: RO Run Conditions: 23.59 °C, 1025.01 mBars, Humidity: 51%, SAE: 0.97
As Rec Stock
Max Power = 155.90
6/05 3,586km R/T/g 40psi Stock
- Run_007.drf - 22/09/2006 3:38:00 PM Run Type: RO Run Conditions: 41.32 °C, 1014.94 mBars, Humidity: 3%, SAE: 1.01
M421-SD503
Max Power = 158.75
6/05 3,586km R/T/g 40psi Micron full sys KN Graves
- Run_011.drf - 29/09/2006 9:04:32 AM Run Type: RO Run Conditions: 28.79 °C, 1023.11 mBars, Humidity: 37%, SAE: 0.99
M421-SD504
Max Power = 160.74
6/05 3,846km R/T/g 40psi Micron full sys PiperX
- Run_015.drf - 30/09/2006 9:08:34 AM Run Type: RO Run Conditions: 26.65 °C, 1024.62 mBars, Humidity: 34%, SAE: 0.98
M421-SD505
Max Power = 161.84
6/05 3,846km R/T/g 40psi Micron full sys PiperX Graves V/S

SYDNEY DYNO Pty Ltd Kensington 0418 224000

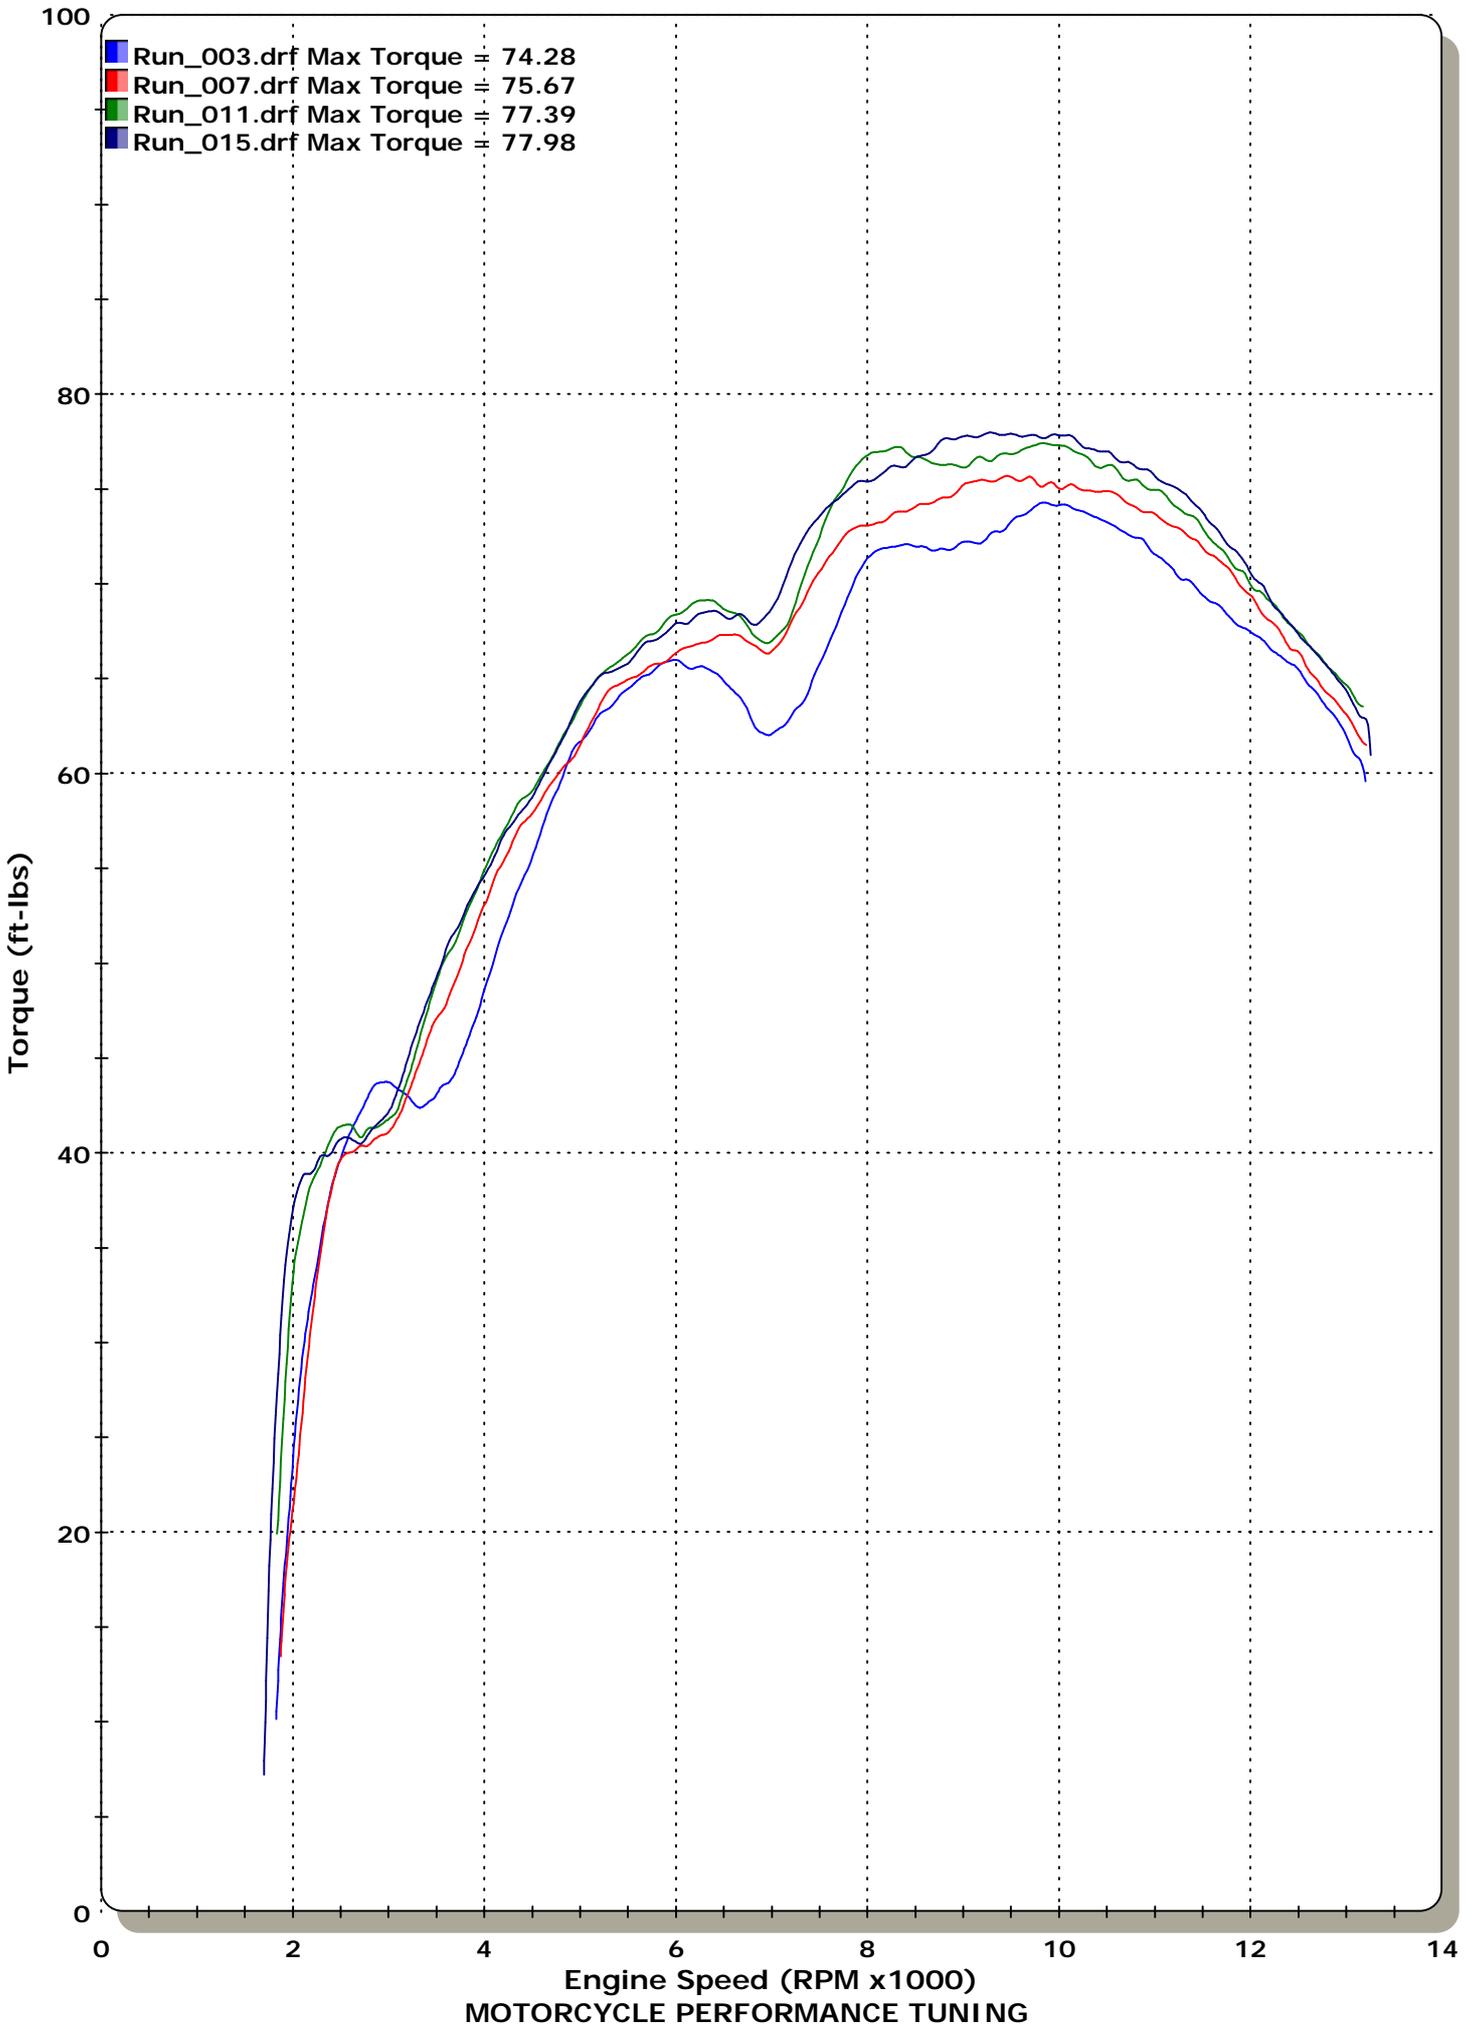

- Run_003.drf - 9/09/2006 12:03:12 PM Run Type: RO Run Conditions: 23.59 °C, 1025.01 mBars, Humidity: 51%, SAE: 0.97
As Rec Stock
Max Torque = 74.28
6/05 3,586km R/T/g 40psi Stock
- Run_007.drf - 22/09/2006 3:38:00 PM Run Type: RO Run Conditions: 41.32 °C, 1014.94 mBars, Humidity: 3%, SAE: 1.01
M421-SD503
Max Torque = 75.67
6/05 3,586km R/T/g 40psi Micron full sys KN Graves
- Run_011.drf - 29/09/2006 9:04:32 AM Run Type: RO Run Conditions: 28.79 °C, 1023.11 mBars, Humidity: 37%, SAE: 0.99
M421-SD504
Max Torque = 77.39
6/05 3,846km R/T/g 40psi Micron full sys PiperX
- Run_015.drf - 30/09/2006 9:08:34 AM Run Type: RO Run Conditions: 26.65 °C, 1024.62 mBars, Humidity: 34%, SAE: 0.98
M421-SD505
Max Torque = 77.98
6/05 3,846km R/T/g 40psi Micron full sys PiperX Graves V/S